



Dim. D	Dim. B	Dim. C	Dim. L	Dim. E	Dim. F
70	50	-	12	-	-
70	50	-	12	-	-
70	50	-	12	-	-
74	40	-	-	-	-
74	70	-	-	-	-
74	70	-	-	-	-
<hr/>					
100	50	-	12	-	-
100	50	-	12	-	-
100	50	-	12	-	-
104	40	-	-	-	-
104	70	-	-	-	-
104	70	-	-	-	-
<hr/>					
150	50	75	12	-	-
150	50	75	12	-	-
150	50	75	12	-	-
154	40	-	-	-	-
154	70	-	-	-	-
154	70	-	-	-	-
<hr/>					
200	63	100	14	50	12.5
200	63	100	14	50	12.5
200	63	100	14	50	12.5
200	63	100	14	50	12.5
204	40	-	-	-	-
204	70	-	-	-	-
204	70	-	-	-	-
<hr/>					
225	63	125	14	50	12.5
225	63	125	14	50	12.5
225	63	125	14	50	12.5
229	40	-	-	-	-
229	70	-	-	-	-
<hr/>					
255	75	155	17	50	12.5
255	75	155	17	50	12.5
255	75	155	17	50	12.5
259	40	-	-	-	-
259	70	-	-	-	-
<hr/>					
285	75	185	17	50	12.5
285	75	185	17	50	12.5
285	75	185	17	50	12.5
290	40	-	-	-	-
290	70	-	-	-	-
<hr/>					
305	75	205	17	50	12.5
305	75	205	17	50	12.5
305	75	205	17	50	12.5
310	40	-	-	-	-
310	70	-	-	-	-


LIPPED 'C' SECTION STUD

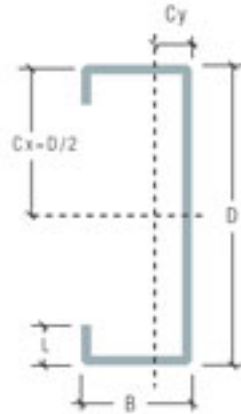

PLAIN 'C' SECTION TRACK

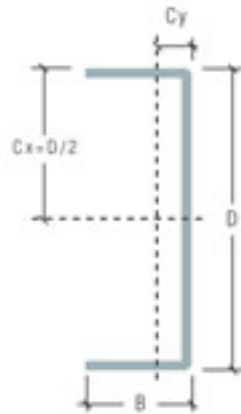

UltraBEAM SECTION STUD

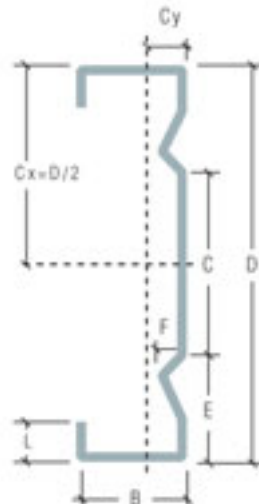

- Stud profiles referenced 'F'
- Tracks profiles referenced 'T'
- Standard track in 1.2mm and 1.5mm gauge
- Heavy duty track in 2mm and 2.5mm gauge
- Track - 3 metre lengths as standard
- B38 and B100 lateral and diagonal bracing - 4 metre lengths as standard.
- 100mm x 35mm service slots punched 600mm from each of stud section to order in 70 - 150 series studs only

Quality steel to EN 10147: 2000 S390GD+Z275-N-A-C.
Pre-hot dipped galvanised to BSEN 10147: 1995. Coating Z275.

All dimensions in mm. Drawings not to scale.